


CONTENTS

SLOPE




8-32 Crossbar
Screws (x2)

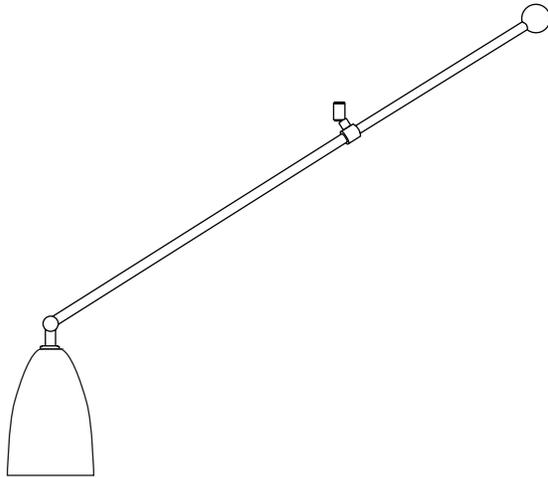


Wago Connector (x2)




Crossbar



Canopy assembly




Canopy thumb nuts




LED Bulb



Stem and cover tube




(x2) Wood screw
On 240V fixtures only




(x2) Long 8-32 screw
On 240V fixtures only



(x2) Metal screw
On 240V fixtures only



(x2) Toggle anchor
On 240V fixtures only



SAFETY INFORMATION

Only one light bulb per socket.
Only suitable for direct mounting on non-combustible surfaces.
Under no circumstances can Slope be mounted on normally flammable surfaces.
Suitable for dry, indoor use only.
Maximum ambient temperatures: 25° C

Stem and cover tube length adjustment

Note: Please contact a licensed electrician.


Example fixture only:

To measure length of stem, first determine overall length (OAL), subtract 1" for the canopy height and subtract the fixture height from the OAL. Fixture height is measured from bottom of the fixture to stem connection point.

The resulting measurement is the final stem length.

Ex. The fixture below has an OAL of 40" and a fixture height of 21".

$$40'' \text{ OAL} - .25'' \text{ canopy} - 21'' \text{ fixture height} = 14.75'' \text{ stem}$$

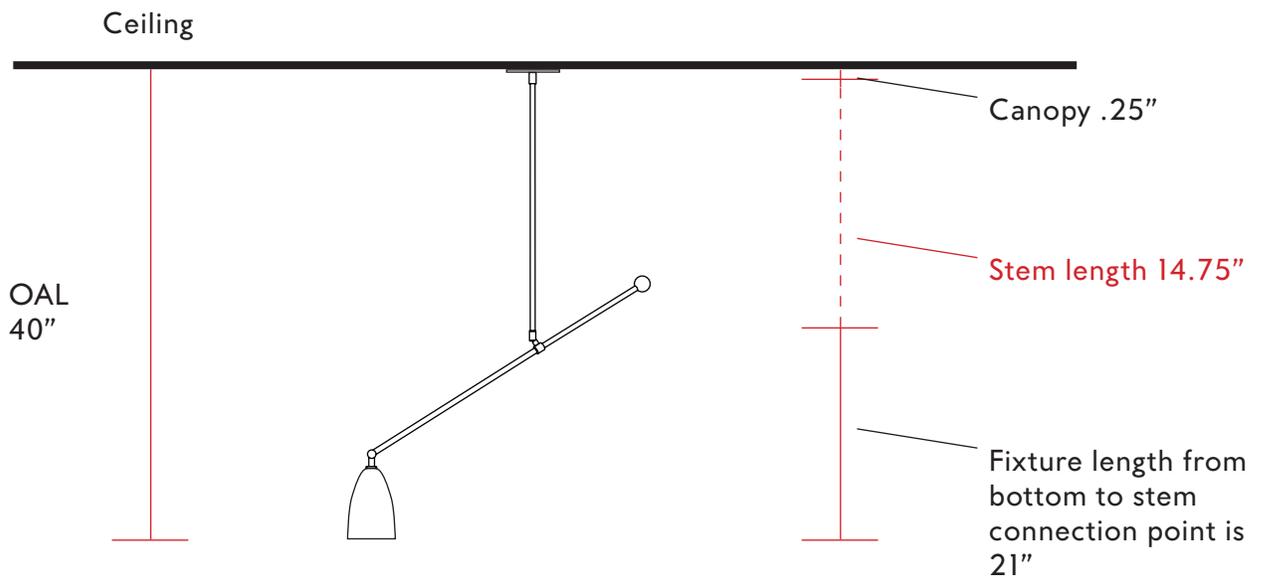


Stem and cover tube length adjustment


Note: Please contact a licensed electrician.

Example fixture only:


1. To customize the length of the provided stem, cut cover tube to desired length. Then cut the inner threaded tube so that it remains 1/2" longer than the cover tube.

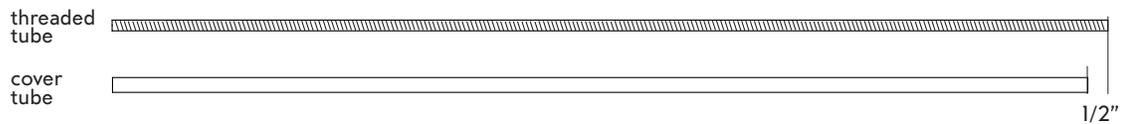


2. Mark the length of the tube required, using a marker or tape. Then hold down the tube with a hand or a clamp, use a hacksaw or electrical tool to cut the tube. Recommended to clean tube after cutting to remove any metal chippings.

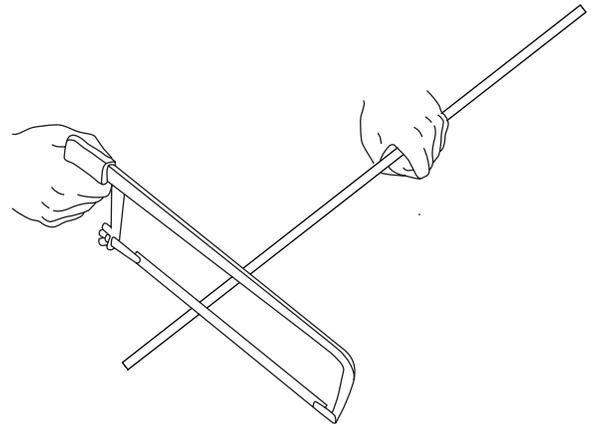

3. Now that the cover tube is cut to 14.75", measure the all thread tube to be 15.25" long. And place a mark, with a marker or tape.

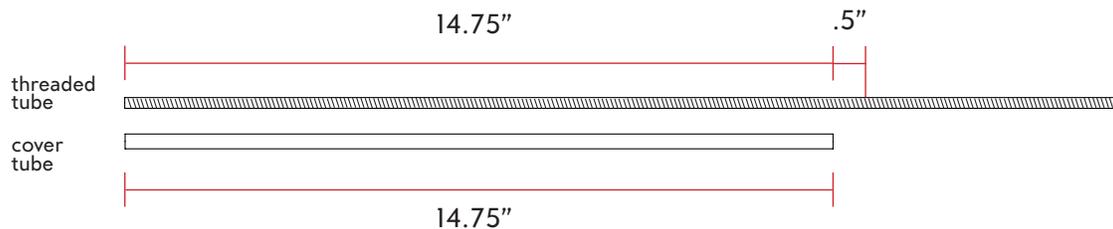


4. Hold down the all thread with a hand or a clamp, use a hacksaw or electrical tool to cut the all thread tube. Recommended to clean all thread tube after cutting to remove any metal chippings.

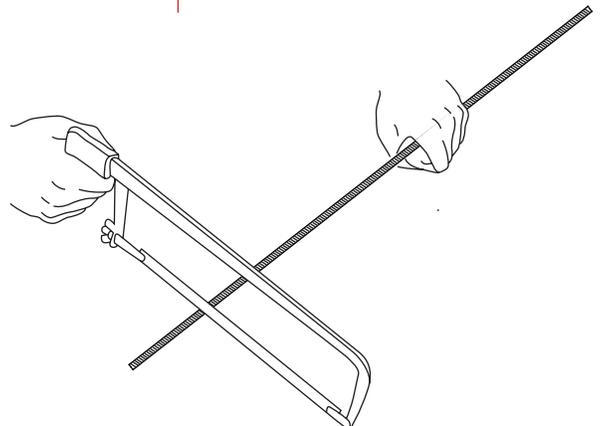

CEILING INSTALLATION | SLOPE

Note: Please contact a licensed electrician.


1. Attach the crossbar (A) to the J-box (B) using two screws (C). Be sure to use the long rounded space on the crossbar for the j-bpx screws.
2. Connect the ground wire to crossbar using the provided 2 port wago (D). Be sure to pull out the lead wires.

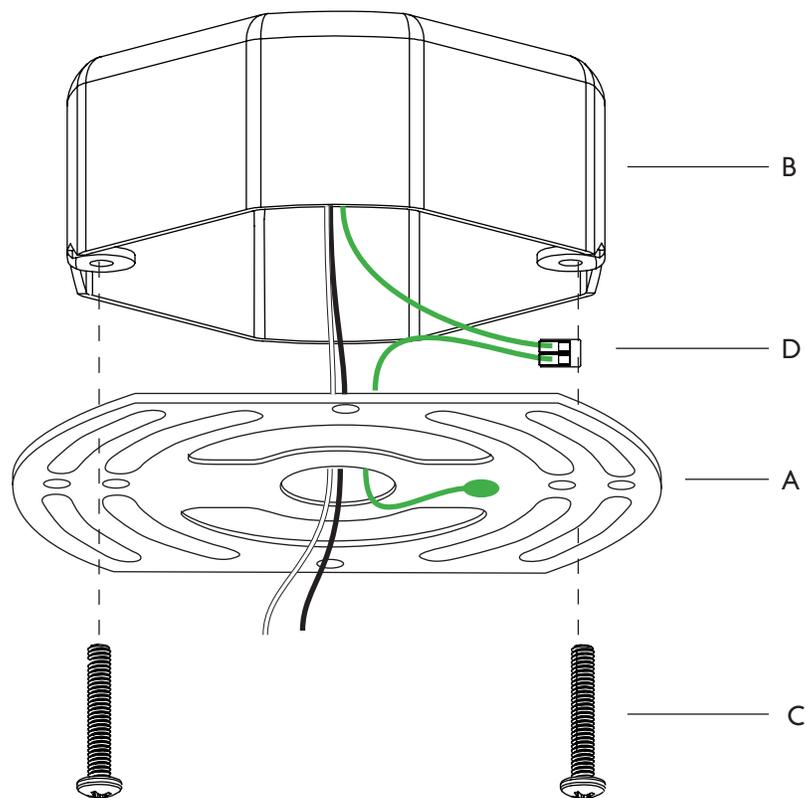

CEILING INSTALLATION | SLOPE

Note: Please contact a licensed electrician.


3. Feed the wires from the fixture (E), through the threaded stem and cover tube (F).
4. Then screw in the threaded stem with cover tube onto the hang-straight (G).

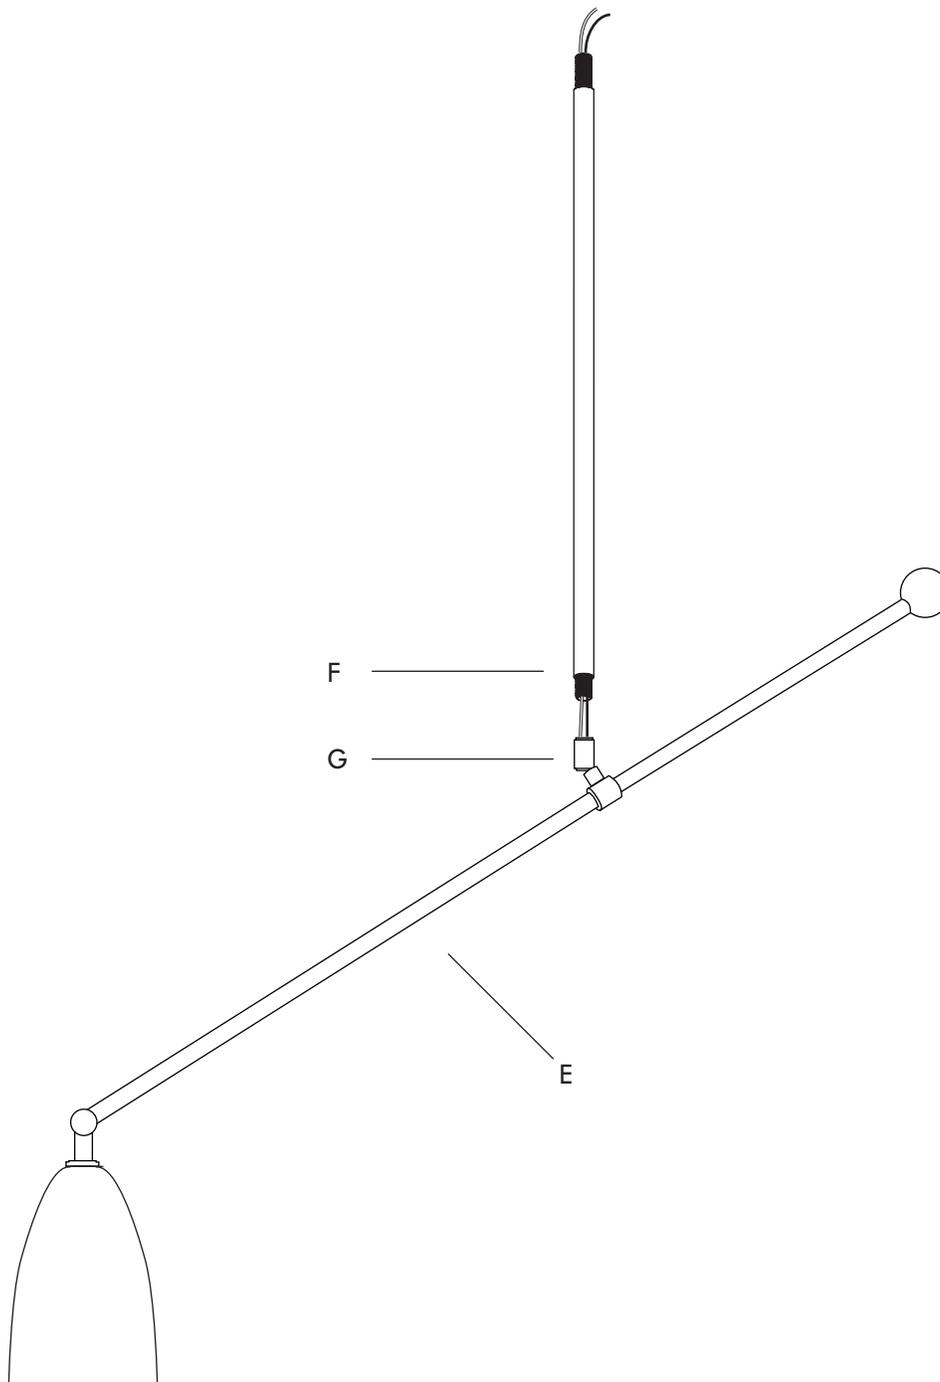

CEILING INSTALLATION | SLOPE

Note: Please contact a licensed electrician.

5. Feed the wires from the stem (F), through the canopy (H). Then screw in the stem into the hang-straight (I).
6. Make the electrical connection between the fixture and J-box wires with the provided 2 port wagos (J).
7. Lift the fixture to the crossbar (C), tucking in all the wires into the J-box, and secure the canopy (H) to crossbar (C) with two thumb screws (K).

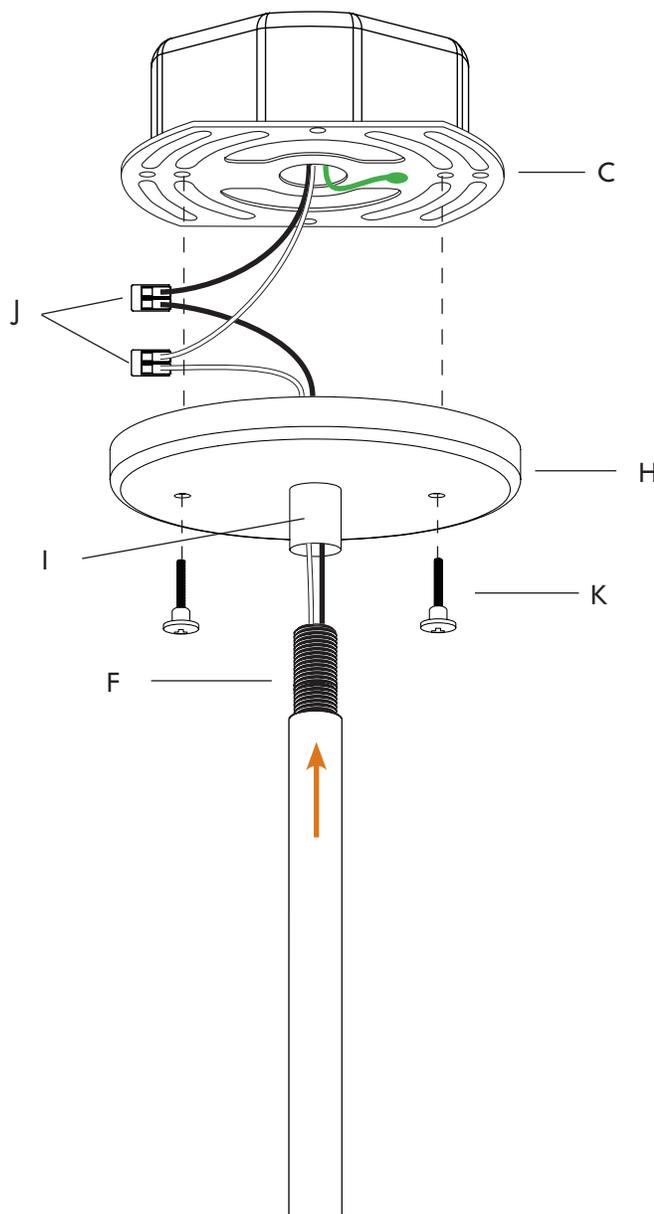

BULB INSTALLATION | SLOPE

Note: Please contact a licensed electrician.

1. Screw in the provided LED bulb (A) into the socket inside the shade (B).

