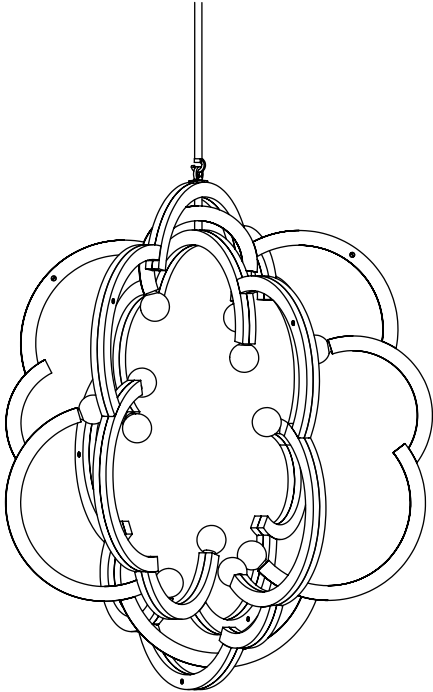









CONTENTS

<div>Blow Pendant</div> 	<div>Canopy</div> 	<div>Crossbar</div> 
	<div>Stem</div> 	<div>8-32 Screws (2)</div> 
		<div>Hangstraight</div> 
<div>Bulbs (12)</div>  <div>Incandescent 25-Watt</div>	<div>1/4 IPS Nipple</div> 	


SAFETY INFORMATION

Only one light bulb per socket.
Only suitable for direct mounting on non-combustible surfaces.
Under no circumstances can Blow Fixtures be mounted on normally flammable surfaces.
Suitable for dry, indoor use only.
Maximum ambient temperatures: 25° C

BLOW PENDANT INSTALLATION

1. Install crossbar using 8-32 screws to junction box in ceiling. It is recommended to pull the main wires out so they are accessible while making the main connection later.

2. Screw the hangstraight body with stem and 1/4 IPS nipple into the crossbar. Note that the hangstraight nut and canopy are not attached at this point and hang below the junction box connection. This will allow you to make the lead connections.

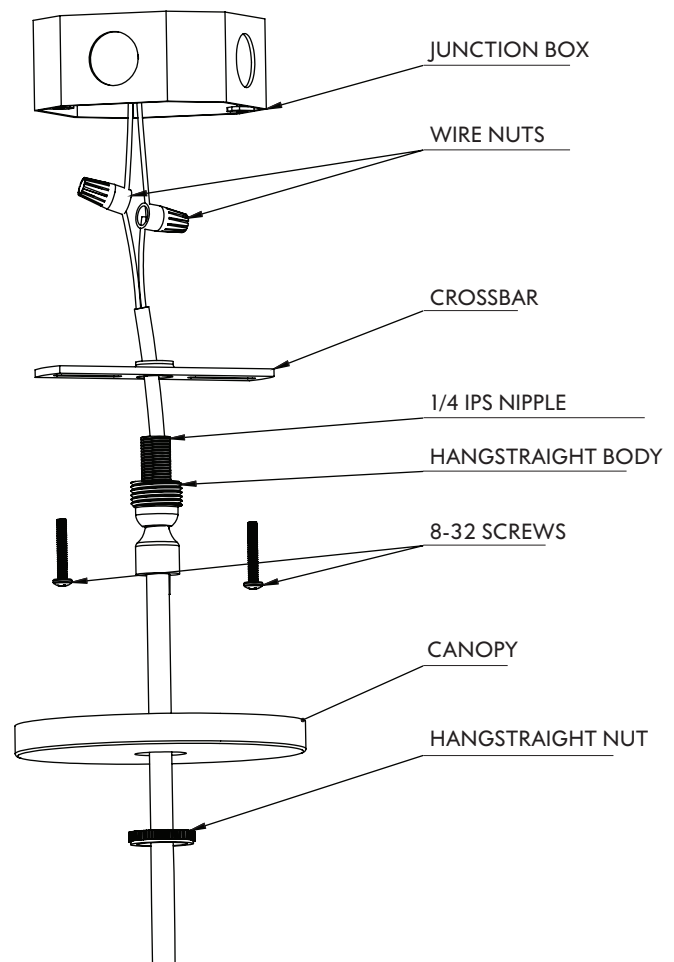

3. Carefully lift the fixture, supporting all the rings, and attach the loop over the hook on the end of the stem.

4. Once the fixture is secured on the hook, guide the lead from the fixture through the stem and up to the junction box. Strip the wires and make the connections to the leads in the ceiling.

5. Once the leads from the fixture are connected to the leads from the ceiling, tuck the wires into the junction box and raise the canopy and hangstraight nut. Thread the nut on, tightening the canopy flush to the ceiling.

6. Install light bulbs once fixture is hung.

